


Model 3138 17"

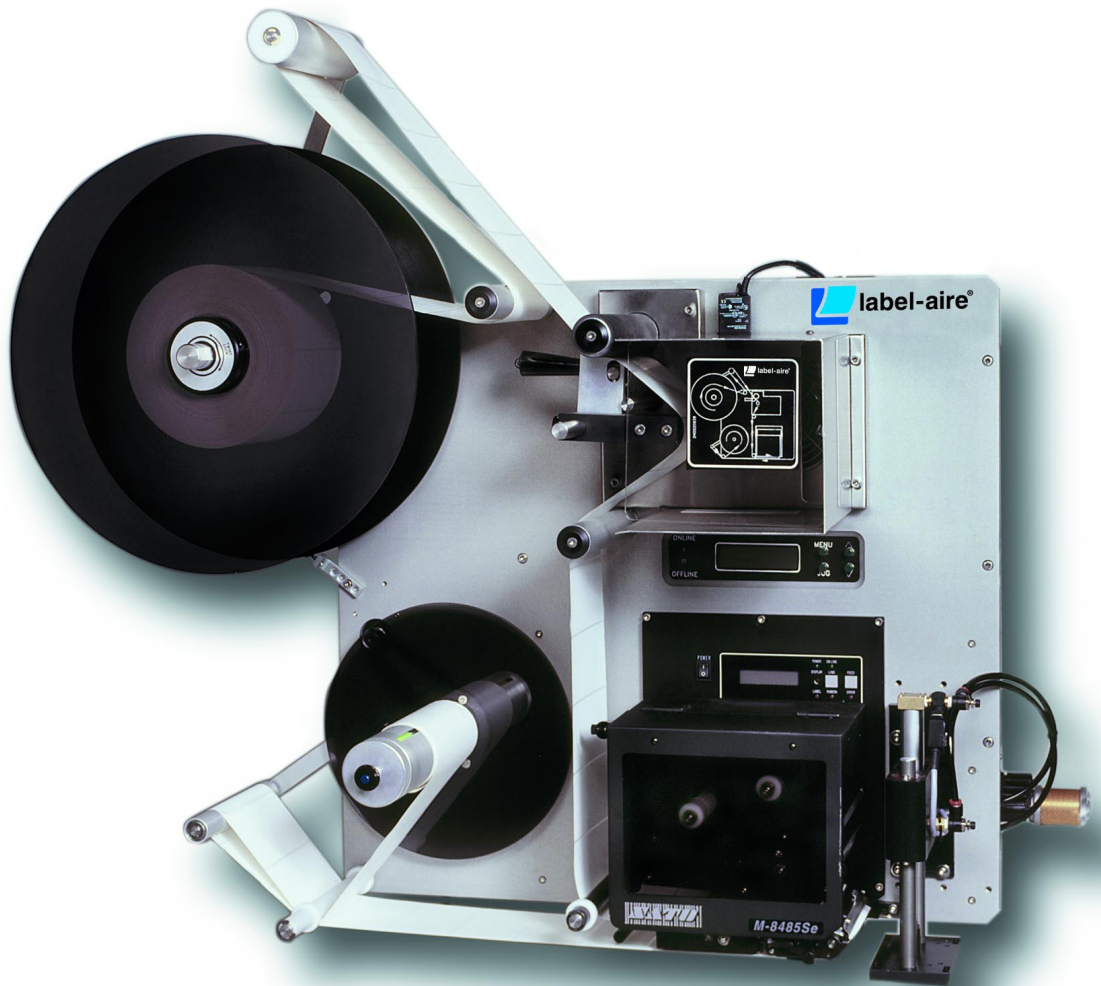

3138 17" Powered Unwind

Printer Applicator


Powered Unwind

3138 17" Powered Unwind Applicator Specifications

The Label-Aire® Model 3138 Printer Applicator makes print-and-apply labeling easier...the 17" (432 mm) Powered Unwind configuration helps to significantly reduce downtime making your business even more profitable.

The 3138 17" Powered Unwind printer applicator is every bit as advanced a workhorse as the standard 3138 and has all the same key features. An enhanced two-line digital display with full error messaging, velocity compensation with optional encoder which results in accurate label placement through changes in product velocity, and multi-page memory (for saving setup parameters) come standard. All these handy features greatly simplify setup and change-overs. Like all 3138 models, the 3138 17" Powered Unwind is just as tough as it is versatile and advanced. The increased roll capacity of the large 17" (432 mm) powered unwind is perfect for high-speed, heavy duty operation. The 3138's rugged stainless steel and anodized aluminum construction is corrosion resistant providing long-lasting durability and maintenance-free operation in the most hostile environments. Like all Label-Aire printer applicators, the 3138 17" Powered Unwind is compatible with any O.E.M. printer on the market.

Put this advanced workhorse printer applicator to work for you all day, every day. The Model 3138 17" Powered Unwind Printer Applicator is built to meticulous quality standards and designed to operate reliably under the most intense conditions.

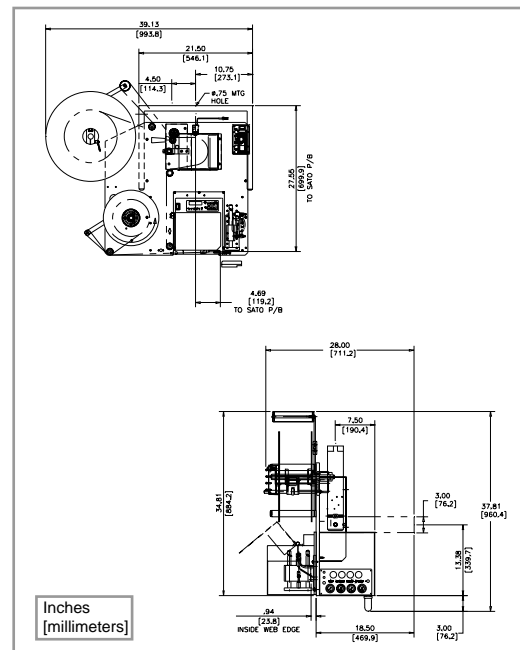

Dimensions:

Height: 37.8" (960 mm)
 Length: 39.1" (993 mm)
 Width: 28" (711 mm)

Weight:

Approx. 190 lbs. (86 kg)

Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)
 Label Length: Up to 7" (178 mm)
(Printer dependent)

Dispense Speed:

Up to 12" (305 mm) per second depending on printer and label size

Label Placement Accuracy:

+/- 1/32" (.8 mm)

Electrical:

115 Volts AC 60 Hz, 5 Amps.
 220 Volts AC, 50 Hz, 5 Amps.

Air:

4 cfm at 90 psi for most applications

Options:

All O.E.M. print engines
 Label on pad detection
 Dual Action Tamp (DAT) configuration*
 90° swing tamp
 Checkpoint tag retrofit
Consult factory for additional options.
 *Consult factory for availability.

3138 17" Powered Unwind Advanced Features	
17" (432 mm) powered unwind	Geared for high-speed, heavy duty operation.
Velocity compensation (with optional encoder)	Results in accurate label placement through changes in product velocity.
Heavy duty air cylinder	For reliable 24/7 label application.
Two-line digital display	Includes full error messaging for added convenience.
Multi-page memory	Allows storage of setup parameters.
PLC outputs	User-configurable for system output.
Strobe signals	Warns of "end of label/ribbon" and "low ribbon". "Low label" is available.



Headquarters

550 Burning Tree Road
 Fullerton, CA 92833 USA

o 714.441.0700
 f 714.526.0300
 e info@label-aire.com
 w www.label-aire.com

Europe

Sjaellandsvej 27A
 DK-9500 Hobro, Denmark

o +45 9657 0063
 f +45 9657 0064
 e info@label-aire.com
 w www.label-aire.com

Distributed by:

MPI Label Systems
866-364-3585
www.mpilabels.com
info@mpilabels.com