

Inline 5100



## Inline 5100

Labeling System



The NEW Label-Aire® Inline 5100 labeling system is designed to offer you advanced features while also making labeling easier, faster, and more affordable... making your operation more profitable.

The advanced Inline 5100 is a rugged stainless steel cabinet based (including frame and side plates) labeling system that can be outfitted with Label-Aire's full range of Label-Aire New Generation 3100/3000 Series applicators (wipe-on, air-blow, or tamp-blow). The Inline 5100 also has a smooth-running Variable Frequency Drive (VFD) conveyor which improves label placement accuracy. For added convenience, this model automatically spaces your products and has a user-friendly operator interface. All these features means the Inline 5100 easily adapts to your growing needs. Designed for reliable full- and partial wrap labeling at medium- to high speeds, high-volume, multi-shift operations, the tough and advanced Inline 5100 delivers.

Have a Label-Aire Authorized Distributor contact you. Visit [www.label-aire.com](http://www.label-aire.com).



# Inline 5100 Specifications

## Dimensions:

Height: 71" (1,804.35 mm)  
 Length: 78.74" (2,000 mm)  
 Width:\* 33.41" (848.70 mm)

## Weight:

Approx. 1,050 lbs. (475 kg)

## Standard Label Dimensions: \*\*

Max. Web Width: 7.13" (181 mm)  
 Min. Web Width: .63" (16 mm)  
 Min. Label Length: .5" (13 mm)

## Label Packaging: \*\*

12" (305 mm) O.D. rolls std. on  
 3" (76 mm) I.D. cores  
 Up to 16" (406 mm) or 20" (508 mm)  
 roll with optional 16" (406 mm)  
 non-powered rewind or  
 20" (508 mm) powered unwind

## Conveyor Speed:

Up to 1,200" (30.48 m) per minute  
 with Variable Frequency  
 Drive (VFD)

## Label Dispense Accuracy: \*\*

Up to +/- 1/32" (.8 mm)

## Electrical:


120 Volts AC 60 Hz 20 Amps.  
 220 Volts AC 50 Hz optional (CE)

## Air:

2 cfm at 60 psi to 90 psi required  
 with imprinter option

\*Without label applicators

\*\*Model 3115 Wipe-On specifications

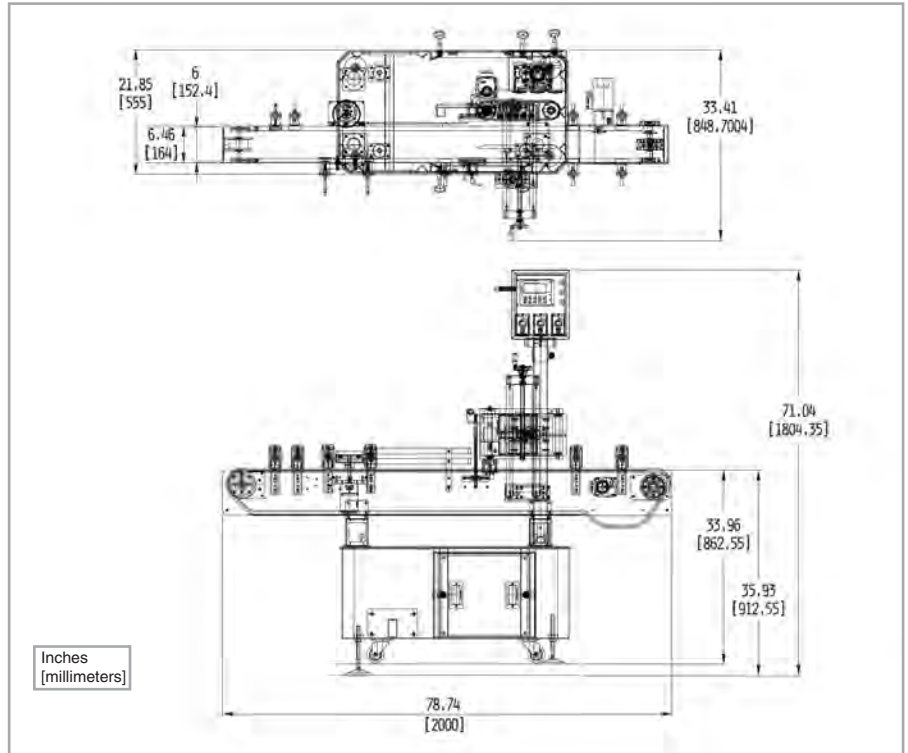

Stated dimensions are approximations. Please consult factory if dimensions are required for line integration.

<b>Main Drive:</b> Line Speed	Variable Frequency Drive (VFD) up to 1,200" (30.48 m) per minute
<b>Construction:</b> Frame Cabinet	Stainless Steel Stainless Steel
<b>Conveyor:</b> Width Length Height	Stainless Steel Side Plates 6.0" (152.4 mm) 6' (1,828.8 mm) center line-to-center line 36" (914.4 mm) ± 2" (50.8 mm)
<b>Applicator:</b>	Label-Aire 3100/3000 Series Primary Applicators
<b>Operator Interface:</b> Control	VFD Speed Control Push Button Start/Stop
<b>Metering Wheel:</b> Drive	Single VFD
<b>Wrap Belt:</b> Drive	7.0" (177.8 mm) Wide x 12.0" (304.8 mm) Long VFD

Consult factory for additional options.



## Headquarters

550 Burning Tree Road  
 Fullerton, CA 92833 USA

o 714.441.0700  
 f 714.526.0300  
 e info@label-aire.com  
 w www.label-aire.com

## Europe

Sjællandsvej 27A  
 DK-9500 Hobro, Denmark

o +45.9657.0063  
 f +45.9657.0064  
 e info@label-aire.com  
 w www.label-aire.com

## Asia

No. 10, Lane 228, Taisi S. Road  
 Longjing Township  
 Taichung County 434, Taiwan

o +886.4.2395.5684  
 f +886.4.2395.8007  
 e info@label-aire.com  
 w www.label-aire.com

## Distributed by:

**MPI Label Systems**  
 866-364-3585  
 www.mpilabels.com  
 info@mpilabels.com