


Cosmos[®] 612 with AKO Hot Stamp Imprint

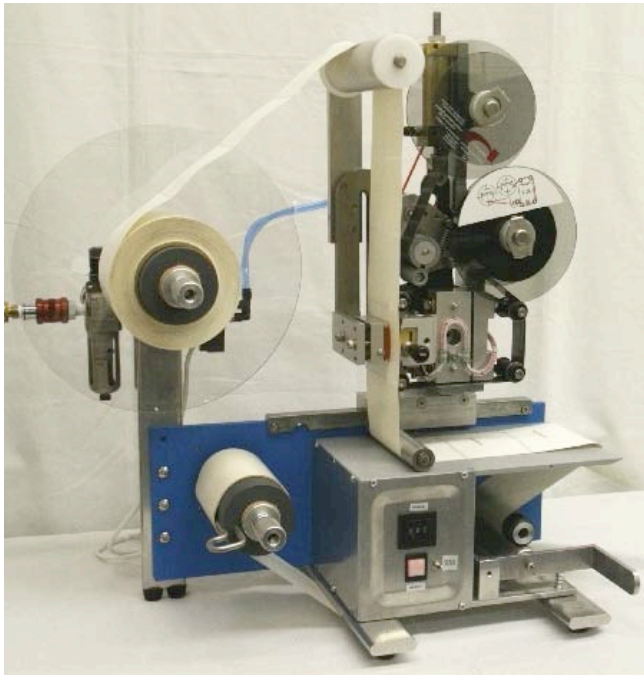

This semi automatic dispenser with the Norwood AK7 or AK15 hot stamp imprinter provides printing and dispensing of clear non-smear imprints on virtually any label. The label may be printed perpendicular or parallel to the web flow. As the label is dispensed off the peel edge, it will be detected by a reflective photocell that detects opaque labels. The label advances the pre-set distance then stops to activate the hot stamp imprinter.

Features

Heavy duty aluminum construction: Durable low maintenance construction for a shop floor environment.

Rear powered waste rewriter (shown above): Winds scrap liner out of operator's way and off the floor .

C-Eye Label detector (die-cut labels only): For Semi-Automated label presentation.

Easily adjustable supply roll tension clutch: Adjusts tension for consistent label peeling.

X-Y Adjustable Mounting Bracket: Provides hot stamp imprinter placement adjustability over the label.

Rotary thumbwheel: Allows user to dial in desired feed length.

Options

- CD Label Counter: Displays number of labels dispensed
- Programmable (preset) Counter: Allows unit to be stopped after preset number of labels

Specification

Core Size: 3" I.D. Standard (other sizes optional)
Label Size: Up to a maximum 6" width
Motor: 451 oz. -in. torque, 72 RPM, 120 VAC
Power Requirements: 120 VAC (240 VAC optional)

Distributed by:
MPI Label Systems
866-364-3585
www.mpilabels.com
info@mpilabels.com